

1

2 Generation and propagation of stick-slip waves over a fault with 3 rate-independent friction

4 Iuliia Karachevtseva¹, Arcady V. Dyskin² and Elena Pasternak¹

5

6 ¹School of Mechanical and Chemical Engineering, The University of Western Australia, Australia

7 ²School of Civil and Resource Engineering, The University of Western Australia, Australia

8 *Correspondence to:* Iuliia Karachevtseva (juliso22@gmail.com)

9

10 **Abstract.** Stick-slip sliding is observed at various scales in fault sliding and the accompanied seismic events. It is
11 conventionally assumed that the mechanism of stick-slip over geomaterials lies in the rate dependence of friction. However,
12 the movement resembling the stick-slip could be associated with elastic oscillations of the rock around the fault, which
13 occurs irrespective of the rate properties of the friction. In order to investigate this mechanism, two simple models are
14 considered in this paper: a mass-spring model of self-maintaining oscillations and a one-dimensional (1D) model of wave
15 propagation through an infinite elastic rod. The rod slides with friction over a stiff base. The sliding is resisted by elastic
16 shear springs. The results show that the frictional sliding in the mass-spring model generates oscillations that resemble the
17 stick-slip motion. Furthermore, it was observed that the stick-slip-like motion occurs even when the frictional coefficient is
18 constant. The 1D wave propagation model predicts that despite the presence of shear springs the frictional sliding waves
19 move with the p-wave velocity, denoting the wave as intersonic. It was also observed that the amplitude of sliding is
20 decreased with time. This effect might provide an explanation to the observed intersonic rupture propagation over faults.

21 1 Introduction

22 Earthquakes can lead to catastrophic structural failures and may trigger tsunamis, landslides and volcanic activities
23 (Ghobarah et al., 2006; Bird and Bommer, 2004). The earthquakes are generated at faults, and are either produced by rapid
24 (sometimes ‘supersonic’) propagation of shear cracks/ruptures along the faults, or originated in the stick-slip sliding over the
25 fault. The velocity of rupture propagation is crucial for estimating the earthquake damage. The rupture velocities can be
26 classified by comparison its speed with the speeds of stress waves in the rupturing solid (Rosakis, 2002). There are several
27 types of rupture propagation: supersonic ($V > V_P$), intersonic ($V_S < V < V_P$), subsonic ($V < V_S$), supershear ($V > V_S$), sub-shear
28 ($V_R < V < V_S$) and sub-Rayleigh ($V < V_R$). According to the data obtained from the seismic observation of crustal earthquakes,
29 most ruptures propagate with an average velocity that is about 80% of the shear wave velocity (Heaton, 1990). However, in
30 some cases, supershear propagation of earthquake-generating shear ruptures or sliding is observed (Archuleta, 1984;
31 Bouchon et al., 2000, 2001, 2010; Dunham and Archuleta, 2004; Aagaard and Heaton, 2004). The above observations
32 introduced the concept of supershear crack propagation (e.g., Bizzarri and Spudich, 2008; Lu et al., 2009; Bhat et al., 2007;
33 Dunham, 2007). However, due to the lack of strong motion recording, there are still some debates regarding the data
34 interpretation (Delouis et al., 2002; Bhat et al., 2007). For instance, it was suggested that the 2002 Denali Earthquake was
35 propagated at a supershear speed of about 40 km (Dunham and Archuleta, 2004). However, the data was based on a single
36 ground motion record. The joint inversion of the combined data-set provides a more robust description of the rupture. The
37 recent studies, which are aimed at deriving the kinematic models for large earthquakes, have shown the importance of the
38 type of data used. It has been shown that slip maps for a given earthquakes may vary significantly (Cotton and Campillo,
39 1995; Cohee and Beroza, 1994a).

40 The analytical (e.g., Burridge, 1973) and numerical (e.g., Das and Aki, 1977) research in fracture dynamics indicate that only
41 the Mode II rupture (shear-induced slip occurring in the direction perpendicular to the crack front) can propagate with
42 intersonic velocity ($V_s < V < V_p$) for short durations, as long as the prestress of the fault is high compared to both failure and
43 residual stresses (Dunham, 2007). Intersonic Mode II crack propagation was first confirmed in laboratory by Rosakis et al.
44 (1999).

45 Sliding over pre-existing fractures and interfaces is one of the forms of instability in geomaterials. It is often accompanied by
46 stick-slip – a spontaneous jerking motion between two contacting bodies sliding over each other. It is assumed that the
47 mechanism of stick-slip lies in intermittent change between static and kinetic friction and the rate dependence of the
48 frictional coefficient (Popp and Rudolph, 2004).

49 The investigation of the friction law on geological faults is the key element in the modelling of earthquakes. Rate- and state-
50 dependent friction laws proposed by Dieterich, Ruina and Rice (Dieterich, 1978; Ruina, 1983; Rice, 1983) have successfully
51 modelled frictional sliding and earthquake phenomena. There are two types of frictional sliding between surfaces that
52 include the tectonic plates. The first type occurs when two surfaces slip steadily ($V = V_0$ condition, where V - is relative
53 velocity, V_0 - is the load point velocity) and is analogous to the fault creep (Byerlee and Summers, 1975). In the stable state,
54 the sliding over discontinuities (faults and fractures) is prevented by friction. Modelling of the frictional sliding is an
55 important tool for understanding the initiation and the development of rupture, and also, the healing of the faults. Many
56 models and numerical methods are developed to describe seismic activities and the supershear fracture/rupture propagation
57 (Noda and Lapusta, 2013; Lapusta and Rice, 2003; Lu et al., 2009; Lapusta et al., 2000; Sobolev, 2011; Bak and Tang, 1989;
58 Harris and Day, 1993).

59 The faults are continuously subjected to variations in both shear and normal stresses, and can produce sliding over initially
60 stable fractures or interfaces (Boettcher and Marone, 2004). In the Earth's crust, the increase in shear stress is an obvious
61 consequence of tectonic movement, while oscillations in the normal stress can be associated with the tidal stresses or seismic
62 waves generated by other seismic events. These can generate the second dynamic state when the sliding occurs jerkily (slip,
63 stick and then slip again). This type of sliding is called "stick-slip" sliding which exhibit cyclic behaviour. Brace and Byerlee
64 supposed that the stick-slip instabilities in the tectonic plates are associated with the appearance of earthquakes (Brace and
65 Byerlee, 1966). Both types of sliding are usually investigated using a spring-block model introduced by Burridge and
66 Knopoff in 1967 (Turcotte, 1992). The BK model consists of an assembly of blocks, where each block is connected via the
67 elastic springs to the next block and to the moving plate.

68 In the present paper, we firstly simulate a single element block model, which is one block undergoing frictional sliding on a
69 stiff base. The movement is caused by a spring attached to the block. The other end of the spring moves with a constant
70 velocity. The paper begins with considering stick-slip-like movement occurring under rate-independent friction due to the
71 eigen oscillations of the fault faces and the associated wave propagation. This demonstrates that the rate dependence of
72 friction is not necessarily a controlling phenomenon. We also analyse a simple mechanism of unusually high shear fracture
73 or sliding zone propagation, also referred as the p-sonic propagation of sliding area over a frictional fault. The analysis is
74 based on the fact that accumulation of elastic energy in the sliding plates on both sides of the fault can produce oscillations in
75 the velocity of sliding even if the frictional coefficient is constant. We note that Walker and Shearer (2009) found evidence
76 of the intersonic rupture speeds close to the local P-wave velocity by analysing the Kokoxili and Denali earthquakes seismic
77 data. This paper considers a highly simplified 1-D rod model where many properties of real fault system have been
78 neglected. (Considerable fault geometry simplification is in use in analysing intersonic ruptures, e.g., Bouchon et al., 2010.)

79

80 **2 Single degree of freedom frictional oscillator**

81 We start with the self-excited oscillations, which resembles the stick-slip-like motion, but occurring under constant friction.
 82 A single degree of freedom block-spring model is used for this purpose. A block sliding on a rigid horizontal surface is
 83 driven by a spring whose other end is attached to a driver moving with a constant velocity (Figure 1). All variables and
 84 constants used in equations are listed below in Table 1.

85


86 **Table 1: The list of variables and constants**

87

| Symbol | Meaning | Symbol | Meaning |
|------------|------------------------------|----------|---|
| V_0 | load point velocity | τ | shear stress |
| V | relative velocity of block | τ_f | friction stress |
| k_1 | single spring stiffness | E | Young's modulus |
| m | block mass | c | velocity of longitudinal wave (p=wave) |
| N | gravity force | ω | eigen frequency |
| T | shear force | k_2 | the spring stiffness relating stress and displacement discontinuity (the difference between the rod displacement and the zero displacement of the base) |
| μ | friction coefficient | J_0 | Bessel function of order 0 |
| ω_0 | eigen frequency | J_0' | derivative of Bessel function |
| t | time | i | imaginary unit |
| h | thickness of an infinite rod | ξ | independent variable |
| ρ | volumetric rod density | z | integration variable |
| σ_N | uniform compressive load | f, g | arbitrary functions |
| σ | longitudinal stress | | |

88

89 Friction is assumed to be cohesionless: $T_{cr}=\mu N$, where T_{cr} is the force at which sliding starts.

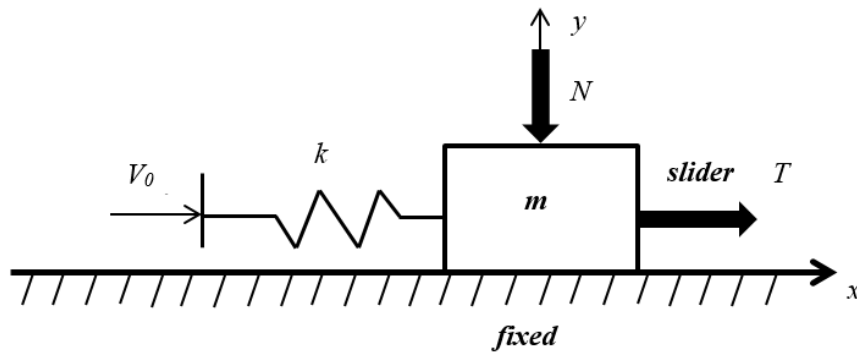

90

91 **Figure 1: The single block model.**

92

93 The system of equations representing the motion of the block reads:

94

$$95 \begin{cases} m\dot{V} = f(T, \mu N) \\ \dot{T} = k_1(V_0 - V) \end{cases} \quad (1)$$

96 The appearance of the $f(T, \mu N)$ function in the system of equations represents the fact that $V \geq 0$.

97 The function $f(T, \mu N)$ is defined as:

$$98 \quad f(T, \mu N) = \begin{cases} T - \mu N, & T > \mu N \text{ and } V > 0 \\ 0, & T < \mu N \text{ or } V < 0 \end{cases} \quad (2)$$

99 In order to represent the system of equations (1) in dimensionless form, it is convenient to introduce a dimensionless time t^* :

$$100 \quad t^* = t\omega_0, \quad \omega_0^2 = \frac{k_1}{m} \quad (3)$$

101 where ω_0 is the eigen frequency of the block-spring system, m is the block mass and k_1 is the spring stiffness.

102 The governing system of equations in dimensionless form is defined as:

$$103 \quad \begin{cases} \dot{V} = f(T^*, \mu N^*) \\ \dot{T} = 1 - V^* \end{cases} \quad (4)$$

104 where the dot represents the derivative with respect to dimensionless time t^* , and V^* , T^* and N^* are the dimensionless
105 velocity, shear force and gravity force respectively.


$$106 \quad V^* = \frac{V}{V_0}, \quad T^* = \frac{T}{mV_0\omega_0}, \quad N^* = \frac{N}{mV_0\omega_0}.$$

107 2.1 Behaviour of the system

108 In order to demonstrate the behaviour of the system at stick-slip-type regime, we consider the block sliding under the
109 following set of initial conditions:

$$110 \quad V(0) = 0, \quad \dot{T}(0) = 0 \quad (5)$$

111 Figure 2 represents the corresponding behaviour of the system (dimensionless velocity vs. dimensionless time).

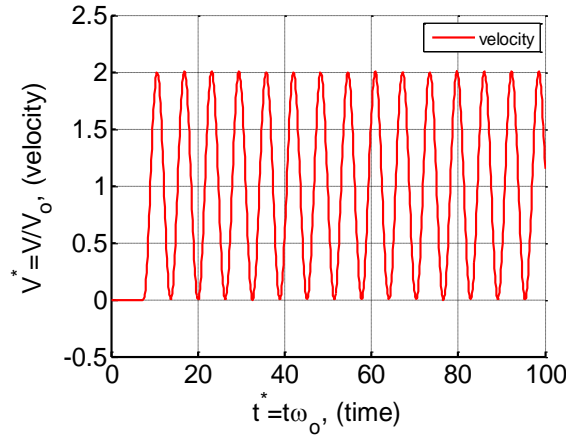

112 **Figure 2: Block sliding with constant friction coefficient.**


114 It is observed that the system exhibits self-excited oscillations even with constant friction coefficient, which somewhat
115 resemble the stick-slip-type sliding. Furthermore, the energy in the system does not change with time, obviously due to the
116 constant energy influx by velocity V_0 , where the excess of the V_0 is dissipated by friction.

117 A detailed investigation of the behaviour of a system described in a section 2 was undertaken in our previous works
118 (Karachevtseva et al., 2014; Karachevtseva et al., 2014).). It should also be noted that similar oscillation-type movements
119 were observed in laboratory experiments on sliding of two granite blocks under biaxial compression (Sobolev et al., 2016).
120
121

122 3 Stress wave propagation in frictional sliding (generalisation 1D solid)

123 In the previous section, we showed the stick-slip-like motion occurring even when the friction coefficient is constant. In this
124 section we will expand our understanding to incorporate the slide over a fault where a stick-slip phenomenon is traditionally

125 flagged as a mechanism of earthquakes. We shall keep assuming the constant friction law, which will permit us to obtain an
 126 analytical solution. For this purpose, following Nikitin (1998), we consider the simplest possible 1D model of fault sliding,
 127 which takes into account the rock elastic response and the associated dynamic behaviour. The model is shown in Figure 3. It
 128 consists of an infinite elastic rod of height (thickness) h , and of unit length in the direction normal to the plane of drawing in
 129 Figure 3. The linear density is ρ and the rod is assumed to be able slide over a stiff surface. The sliding is resisted by
 130 friction. The stiff surface can be described as a symmetry line such that instead of the (horizontal) fault, only the upper half
 131 of the line is considered. The rod is connected to a stiff layer moving with a constant velocity V_0 . The connection is achieved
 132 through a series of elastic shear springs. Both the elastic rod and the elastic springs describe the model of the elasticity of the
 133 rock around the fault, as shown in Figure 3. We assume that the system is subjected to a uniform compressive load σ_N such
 134 that the friction stress is kept constant, which is assumed equal to $\tau_f = \mu\sigma_N = \text{const}$.

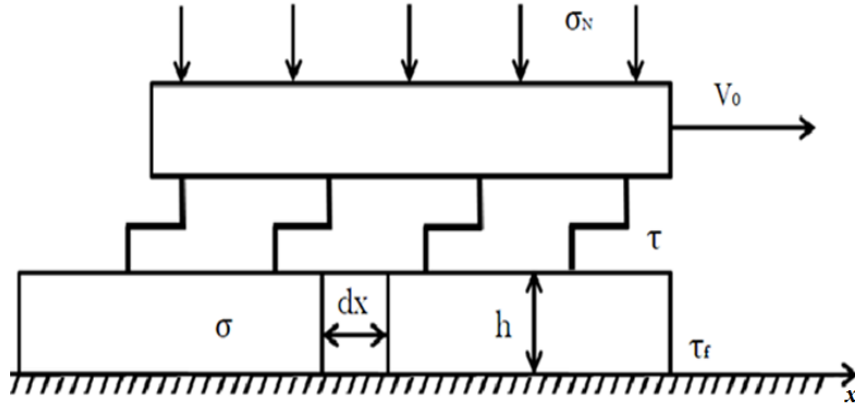

135 **Figure 3: The model of infinitive elastic rod driven by elastic shear spring.**

136 Equation of movement of the rod reads:

137
$$\frac{\partial \sigma}{\partial x} + \frac{1}{h}(\tau - \tau_f) = \rho \frac{\partial V}{\partial t} \quad (6)$$

138 Where σ is the longitudinal (normal) stress in the rod, τ is the contact shear stress, τ_f is the frictional stress, V_0 is the load
 139 point velocity and $V(x,t)$ is the velocity of point x of the rod at time t , as shown in Figure 3.

140 According to the Hooke's law:

141
$$\sigma = E \frac{\partial u}{\partial x} \quad (7)$$

142 where $u(x,t)$ is the displacement and E is the Young's modulus of the rod. After differentiating, we have:

143
$$\frac{\partial \sigma}{\partial t} = E \frac{\partial V}{\partial x} \quad (8)$$

144 The elastic reaction of the shear springs is expressed as:

145
$$\frac{\partial \tau}{\partial t} = k_2(V - V_0) \quad (9)$$

146 where k_2 is the spring stiffness relating stress and displacement discontinuity (the difference between the rod displacement
 147 and the zero displacement of the base).

148 Defining $\Delta V = V - V_0$ and solving the system of equations (6)-(9), we get the following wave equation:

$$\frac{\partial^2 \Delta V}{\partial t^2} = c^2 \frac{\partial^2 \Delta V}{\partial x^2} - \omega^2 \Delta V \quad (10)$$

where $c = \sqrt{Eh/\rho}$ is the velocity of the longitudinal wave (p-wave), $\omega = \sqrt{k_2/(h\rho)}$ is regarded as eigen frequency of the system consisting as a unit length of the rod considered as a lamp mass on the shear springs.

It is observed that despite the presence of shear springs and friction between the rod and the stiff surface, the waves propagate with the p-wave velocity determined by the Young's modulus and density of the rod. Therefore, according to the terminology described in the introduction, the wave should be named *p-sonic wave*. It should be highlighted that while such waves look like the shear waves, they are in fact compressive waves propagation along the rod, hence denoted as the p-wave velocity.

In order to analyse the way the pulse propagates, equation (10) is complemented by the initial conditions as:

$$\Delta V(x, t) = f_0(x); \quad \frac{d\Delta V}{dt} = F_0(x) \quad (11)$$

Solution of wave equation (10) can be found by using the Riemann method (e.g., Koshlyakov, 1964).

$$\Delta V(x, t) = \frac{1}{2} [f(x-ct) + g(x+ct)] + \frac{1}{2} \int_{x-ct}^{x+ct} \Phi(x, t, z) dz \quad (12)$$

where

$$\Phi(x, t, z) = \frac{1}{\sqrt{c^2 t^2 - (z-x)^2}} \varphi(x, t, z) \quad (13)$$

The integral from (12) can be found by using the Chebyshev-Gauss method

$$I(x, t) = \int_{x-ct}^{x+ct} \Phi(x, t, z) dz \approx \frac{\pi}{n} \sum_{j=1}^n \varphi(x, t, x + \xi_j at), \quad \xi_j = \cos\left(\frac{2j-1}{2n} \pi\right) \quad (14)$$

where

$$\varphi(x, t, z) = \frac{1}{c} F(z) J_0\left(\frac{\omega}{c} i \sqrt{c^2 t^2 - (z-x)^2}\right) \sqrt{c^2 t^2 - (z-x)^2} + \omega t f(z) \left(\frac{1}{i}\right) J_0'\left(i \frac{\omega}{c} \sqrt{c^2 t^2 - (z-x)^2}\right) \quad (15)$$

3.1 Propagation of an initial sliding

Figures 3-4 represent the propagation of initial sliding under the different initial conditions. Particularly, a triangular velocity impulse, equation (16) and zero acceleration were used as initial conditions for Figure 3. As shown in Figure 4, linear and harmonic functions are used for velocity and acceleration as initial conditions.

$$f(x; a, b, c) = \max\left(\min\left(\frac{x-a}{b-a}, \frac{c-x}{c-b}\right), 0\right) \quad (16)$$

where x is the vector, a, b, c are scalar parameters.

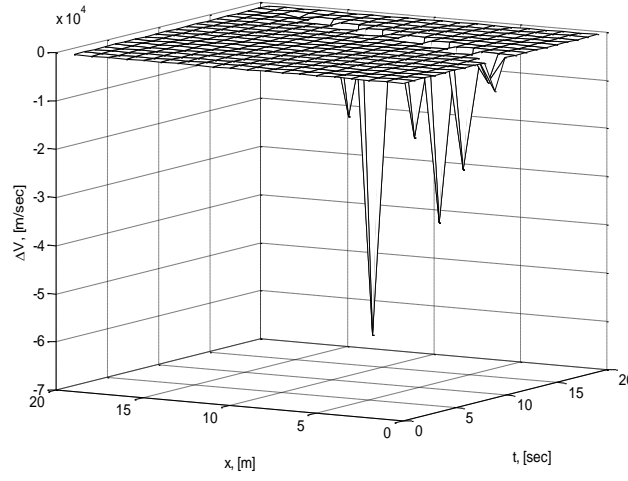


Figure 3: Propagation of initial sliding in the form of a triangular function $f(z)$ of zero area.

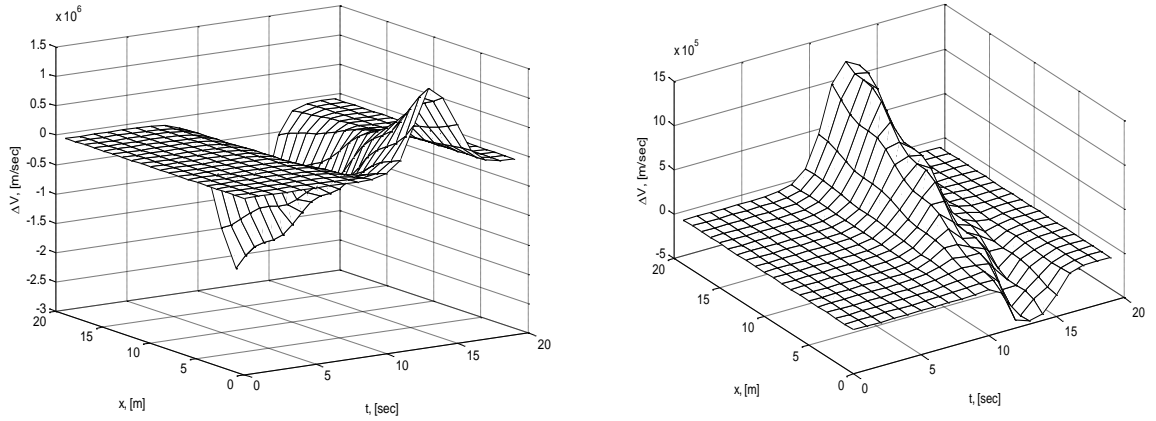


Figure 4: Propagation of initial sliding with different initial conditions.

It is seen that the initial sliding (impulse) propagating with p-wave velocity keeps its width but the amplitude reduces with time. It is also observed that as the impulse propagates, it loses energy which goes to increase the energy of shear springs.

4 Discussion

This paper introduced the notion that the frictional movement resembling the stick-slip sliding, which are often observed and usually attributed to the rate dependence of friction, can be obtained with constant friction by taking into account the elasticity of the surrounding and its self-oscillations. This understanding is applied to propagation of slip over infinitely long fault leads to a simple model that predicts that the slip will propagate with p-wave velocity. This conclusion is made under the assumption of constant (rate-independent) friction. Relaxing this assumption, that is taking into account that

$\tau_f = \tau_f \left(\frac{\partial \Delta V}{\partial t} \right)$ leads to the following equation replacing equation (10):

$$\left(1 + \frac{1}{\rho h} \frac{d\tau_f}{d\Delta V_t'} \right) \frac{\partial^2 \Delta V}{\partial t^2} = c^2 \frac{\partial^2 \Delta V}{\partial x^2} - \omega^2 \Delta V, \quad \Delta V' = \frac{\partial \Delta V}{\partial t} \quad (17)$$

It is seen that when the sliding rate changes slowly, the propagation speed of rupture c_1 can be approximated as:

$$c_1^2 \approx c^2 \left(1 + \frac{1}{\rho h} \frac{d\tau_f}{d\Delta V_t'} \right)^{-1} \quad (18)$$

Furthermore, it is observed that when the friction increases with the sliding rate, c_1 becomes smaller than p-wave velocity. If the rate dependence of friction is lowered further, the slip propagation can become intersonic.

5 Conclusions

In this paper, it is shown that the accumulation of elastic energy in the sliding plates on both sides of the fault can produce oscillations in the velocity of sliding even when the friction is constant. These oscillations resemble stick-slip movement, but they manifest themselves in terms of sliding velocity rather than displacement. The sliding exhibits wave-like propagation over long faults. Furthermore, the 1D model shows that the zones of sliding propagate along the fault with the velocity of p-wave (the propagation speed can however be lower if the rate dependence of friction is taken into account). The mechanism of such fast wave propagation is the normal (tensile/compressive) stresses in the neighbouring elements (normal stresses on the planes normal to the fault surface) causing a p-wave propagating along the fault rather than the shear stress controlling the sliding. This manifests itself as a p-sonic propagation of an apparent shear rupture.

References

- Aagaard, B. T., and Heaton T. H.: Near-source ground motions from simulations of sustained intersonic and supersonic fault ruptures, *Bull. Seismol. Soc. Am.*, 94(6), 2064-2078, doi: 10.1785/0120030249, 2004.
- Aochi, H., Madariaga, R.: The 1999 Izmit, Turkey, earthquake: Nonplanar fault structure, dynamic rupture process, and strong ground motion, *Bull. Seism. Soc. Am.*, 93 (3), 1249-1266, doi:10.1785/0120020167, 2003.
- Archuleta, R. I.: A faulting model for the 1979 Imperial Valley earthquake, *J. Geophys. Res.*, 89, 4559-4585, doi: 10.1029/JB089iB06p04559, 1984.
- Bak, P., Tang, S.: Earthquakes as self-organized critical phenomenon. *J. Geophys. Res., Solid Earth* 94, 15635–15637 doi: 10.1029/JB094iB11p15635, 1989.
- Bhat, H. S., Dmowska, R., King, G. C. P., Klinger, Y.: Off-fault damage patterns due to supershear ruptures with application to the 2001 M_w 8.1 Kokoxili (Kunlun) Tibet earthquake, *J. Geophys. Res.*, 112, B06301, doi: 10.1029/2006JB004425, 2007.
- Bird, J. F., and Bommer, J. J.: Earthquake losses due to ground failure, *Eng. Geol.* 75, 147–179, doi: 10.1016/j.enggeo.2004.05.006, 2004.
- Bizzarri, A. and Spudich, P.: Effects of supershear rupture speed on the high-frequency content of S waves investigated using spontaneous dynamic rupture models and isochrone theory, *J. of Geophys. Res.*, 113, B05304, doi: 10.1029/2007JB005146, 2008.
- Boettcher M.S., and Marone C.: Effects of normal stress variation on the strength and stability of creeping faults, *J. of Geophys. Res.*, 109, B03406, doi: 10.1029/2003JB002824, 2004.
- Bouchon, M., Bouin, M. P., Karabulut, H., Toksoz, M. N., Dieterich, M., and Rosakis, A. J.: How fast is rupture during an earthquake? New insights from the 1999 Turkey earthquakes, *Geophys. Res. Lett.*, 28, 2723-2726, doi: 10.1029/2001GL013112, 2001.
- Bouchon, M., Toksoz, N., Karabulut, H., Bouin, M. P., Dieterich, M., Aktar, M., and Edie, M.: Seismic imaging of the 1999 Izmit (Turkey) rupture inferred from the near-fault recordings, *Geophys. Res. Lett.*, 27, 3013-3016, doi: 10.1029/2000GL011761, 2000.

231 Bouchon, M., Karabulut, H., Bouin, M. P., Schmittbuhl, J., Vallee, M., Archuleta, R., Das, S., Renard, F., Marsan, D.:
 232 Faulting characteristics of supershear earthquakes, *Tectonophysics*, 493, 244-253,
 233 Brace, W. F., and Byerlee, J. D.: Stick-slip as a mechanism for earthquakes, *Science*, 153 (3739), 990-992, doi:
 234 10.1126/science.153.3739.990, 1966.
 235 Burridge, R., Admissible speeds for plane-strain self-similar shear cracks with friction but lacking cohesion, *Geophys. J.*
 236 *Roy. Astron. Soc.*, 35, 439-455, doi: 10.1111/j.1365-246X.1973.tb00608.x, 1973.
 237 Byerlee, J. D., and Summers, R.: Stable sliding preceding stick-slip on fault surfaces in granite at high pressure, *Pure Appl.*
 238 *Geophys.* 113, 63-68, doi: 10.1007/BF01592899, 1975.
 239 Cohee, B. P., and Beroza, G. C.: Slip distribution of the 1992 Landers earthquake and its implications for earthquake source
 240 mechanism, *Bull. Seism. Soc. Am.*, 84(3), doi: 10.1016/0148-9062(95)94486-9, 1994.
 241 Cotton, F., and Campillo, M.: Frequency domain inversion of strong motions: application to the 1992 Landers earthquake,
 242 *J. Geophys. Res.* 100, doi: 10.1029/94JB02121, 1995.
 243 Das, S., Aki, K.: A numerical study of two-dimensional spontaneous rupture propagation, *Geophys. J. Roy. Astron. Soc.*, 50,
 244 643-668, doi: 10.1111/j.1365-246X.1977.tb01339.x, 1977.
 245 Delouis, B., Giardini, D., Lundgren, P., and Salichon, J.: Joint Inversion of InSAR, GPS, Teleseismic, and Strong-Motion
 246 Data for the Spatial and Temporal Distribution of Earthquake Slip: Application to the 1999 Izmit Mainshock, *Bull. Seismol.*
 247 *Soc. Am.*, 92, 278-299, doi: 10.1785/0120000806, 2002.
 248 Dieterich, J.H.: Time-dependent friction and the mechanics of stick-slip. *J. of geophys. research*, 77 (20), 790-806,
 249 doi: 10.1007/BF00876539, 1978.
 250 Dunham, E. M., Archuleta, J. R.: Evidence for a Supershear Transient during the 2002 Denali Fault Earthquake, *Bull.*
 251 *Seismol. Soc. Am.*, 94(6B), S256-S268, doi: 10.1785/0120040616 , 2004.
 252 Dunham, E. M., Conditions governing the occurrence of supershear ruptures under slip-weakening friction, *J. of geophys.*
 253 *research*, 112, B07302, doi: 10.1029/2006JB004717, 2007.
 254 Ghobarah, A., Saatcioglu, M., Nistor, I.: The impact of the 26 December 2004 earthquake and tsunami on structures and
 255 infrastructure, *Eng. Struct*, 28(2), 312-326, doi: 10.1016/j.engstruct.2005.09.028, 2006.
 256 Harris, R. A., and Day, S. M.: Dynamics of fault interaction: parallel strike-slip faults. *J. Geophys. Res.*, *Solid Earth* 98,
 257 4461-4472, doi: 10.1029/92JB02272, 1993.
 258 Heaton, T. H.: Evidence for and implications of self-healing pulses of slip in earthquake rupture, *Phys. Earth Planet. Inter.*,
 259 64, 10-20, doi: 10.1016/0031-9201(90)90002-F, 1990.
 260 Karachevtseva, I., Dyskin, A. V., Pasternak, E.: The cyclic loading as a result of the stick-slip motion, *Advanced Mat.*
 261 *Research*, 891-892, 878-883, doi: 10.4028/www.scientific.net/AMR.891-892.878, 2014.
 262 Karachevtseva, I., Dyskin, A. V., Pasternak, E.: Stick-slip motion and the associated frictional instability caused by vertical
 263 oscillations, *Bifurcation and Degradation of Geomaterials in the New Millennium*, Springer Series in Geomechanics and
 264 Geoengineering, 135-141, doi: 10.1007/978-3-319-13506-9_20, 2015.
 265 Koshlyakov, N. S., Smirnov, M. M., and Gliner, E. B.: Differential equations of mathematical physics, Moscow, 701, 1964.
 266 Lapusta, N., and Rice, J. R.: Nucleation and early seismic propagation of small and large events in a crustal earthquake
 267 model, *J. of geophys. research*, 108 (B4), 2205, doi: 10.1029/2001JB000793, 2003.
 268 Lapusta, N., Rice, J. R., Ben-Zion, Y., and Zheng, G.: Elastodynamic analysis for slow tectonic loading with spontaneous
 269 rupture episodes on faults with rate- and state-dependent friction, 105 (B10), 23,765-23,789, doi: 10.1029/2000JB900250,
 270 2000.
 271 Lu, X., Lapusta, N., and Rosakis, A. J.: Analysis of supershear transition regimes in rupture experiments: the effect of
 272 nucleation conditions and friction parameters, *Geophys. J. Int.*, 177, 717-732, doi: 10.1111/j.1365-246X.2009.04091.x, 2009.
 273 Nikitin, L. V.: Statics and dynamics of solids with an external dry friction, Moscow Lyceum, 272, 1998.

274 Noda, H., and Lapusta, N.: Stable creeping fault segments can become destructive as a result of dynamic weakening, *Nature*, 518-523, doi:
275 10.1038/nature11703, 2013.

276 Popp, K., Rudolph, M.: Vibration Control to Avoid Stick-Slip Motion, *J. of Vibration and Control*, 10, 1585-1600, doi:
277 10.1177/1077546304042026, 2004.

278 Rice, J.R.: Constitutive relations for fault slip and earthquake instabilities. *Pure and Applied Geophysics*, 121(3), 443-475,
279 doi: 10.1007/BF02590151, 1983.

280 Rosakis, A. J., Samudrala, O., and Coker, D.: Cracks faster than the shear wave speed, *Science*, 284, 1337-1340, doi:
281 10.1126/science.284.5418.1337, 1999.

282 Rosakis, A. J.: Intersonic shear cracks and fault ruptures, *Adv. In Phys.*, 51(4), 1189-1257, doi: 10.1080 /0001873021012232
283 8, 2002.

284 Ruina, A.: Slip instability and state variable friction laws. *J. of geophys. research*, 88, 10359-10370, doi:
285 10.1029/JB088iB12p1035 , 1983.

286 Sobolev, G. A.: Seismicity dynamics and earthquake predictability, *Nat. Hazards Earth Syst. Sci.* 11, 445–458, doi:
287 10.5194/nhess-11-445-201, 2011.

288 Sobolev, G. A., Ponomarev A. V., Maibuk, Yu. Ya.: Initiation of unstable slips-microearthquakes by elastic impulses,
289 *Izvestiya, Physics of the Solid Earth*, 52(5), 674-691, doi: 10.1134/S106935131605013X, 2016.

290 Turcotte, D. L.: *Fractals and chaos in geology and geophysics*, Cambridge University Press, 221, doi:
291 10.1002/gj.3350280216, 1992.

292 Vallee, M. M., Landes, M., Shapiro, N. M., Klinger, Y.: The 14 November 2001 Kokoxili (Tibet) earthquake: High-
293 frequency seismic radiation originating from the transitions between sub-Rayleigh and supershear rupture velocity regimes,
294 *J. of geophys. research*, 113, B07305, doi:10.1029/2007JB005520, 2008.

295 Walker, K. T., Shearer, P. M.: Illuminating the near-sonic rupture velocities of the intracontinental Kokoxili Mw 7.8 and
296 Denali fault Mw 7.9 strike-slip earthquakes with global P wave back projection imaging, *J. of geophys. research*, 114,
297 B02304, doi:10.1029/2008JB005738, 2009.